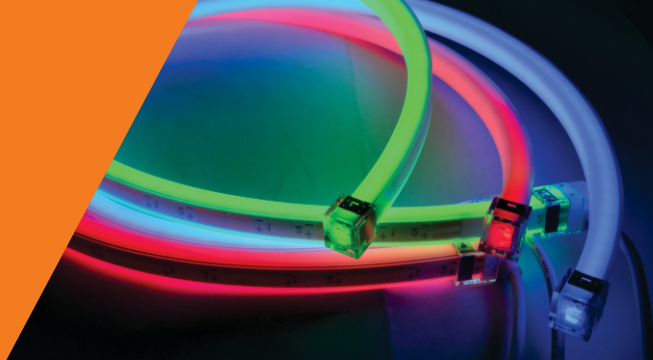

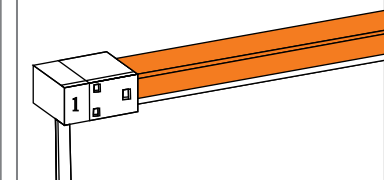



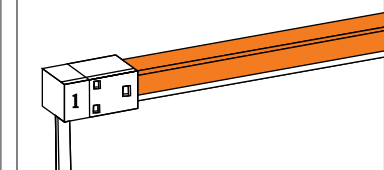








# FLEXIBLE LED BUNDLED PRICING INCLUDES:

\*Available only for qualifying orders



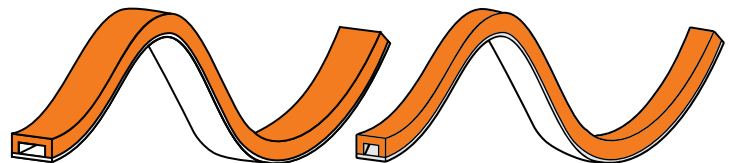
## LumiStrap & LumiLine Installation Materials

<p><b>700-1025</b> LumiStrap End Cap</p> 	<p><b>700-1032</b> LumiStrap Quick Input Power Connector Set (bottom)</p> 	<p><b>700-1030</b> LumiStrap 38.375" Aluminum Mounting Channel</p> 	<p><b>700-1033</b> LumiStrap 2" Aluminum Mounting Clip</p> 
<p><b>700-1040</b> LumiLine End Cap</p> 	<p><b>700-1041</b> LumiLine Quick Input Power Connector Set (bottom)</p> 	<p><b>700-1037</b> LumiLine 38.375" Aluminum Mounting Channel</p> 	<p><b>700-1038</b> LumiLine 2" Aluminum Mounting Clip</p> 
<p><b>700-1035</b> Flexible LED Neon Cutter &amp; File Set</p> 	<p><b>700-1031</b> Silicone Grease</p> 	<p><b>185-0154</b> J-Box</p> 	<p><b>HLG-240H-24A</b> Mean Well 240W 24VDC LED Driver</p> 

## Linear Lighting Product

### DETAILS

Input	100-240 VAC
Output	24 VDC
Max. Load Footage	32 ft. (49 ft. with dual power supply configuration)
Watts per Foot	LumiStrap 7.60, LumiLine 3.70
Dimming Capable	Yes
Bending Parameters	LumiStrap 4.70in., LumiLine 3.93in.
Limited Warranty Terms	5 Years
Materials	Silicone
Dimensions	LumiStrap 0.50 x 1.00 LumiLine 0.55 x 0.63
Certification	cURus



**918.622.4978**  
www.lektroninc.com  
sales@lektroninc.com