



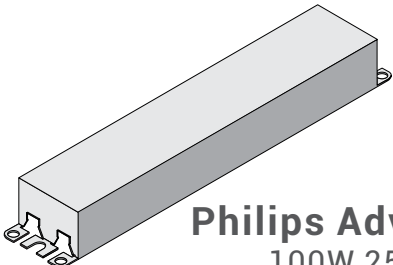













RIGID LED BUNDLED PRICING INCLUDES:



Power Supplies & All Installation Materials


 <p>185-1054 J-BOX</p>	 <p>185-0030 STRAIN RELIEF</p>	 <p>185-5049 #10 x 3" PAN HEAD SCREW</p>	 <p>185-9005 LASER RAINSHIELD COUPLING</p>
 <p>Philips Advance 100W 25V LOW VOLTAGE TRANSFORMER</p>	 <p>185-0007 PLTC CABLE</p>	 <p>185-5009 #10-16 x 3/4" TEK SCREW W/ NEOPRENE WASHER</p>	 <p>185-0055 LEON RAINSHIELD COUPLING</p>
 <p>190-5533 VERTICAL ANGLE BRACKET LLS/LSN</p>	<p>12" MAIN LED BOARD</p> 	<p>3.25" BREAK-APART LED BOARD</p> 	 <p>*MOUNTING BRACKET</p>  <p>*WIRE HOLE BRACKET</p>
 <p>185-0062 LEON ENDCAP</p>	 <p>185-0062 LASER ENDCAP</p>	 <p>CAULK</p>	

Linear Lighting Product


DETAILS

Input	120-277 VAC
Output	24 VDC (Philips Advance)
Max. Load Footage	64 Lineal ft. 20L 48 Lineal ft. 30L & 24L
Watts per Foot	< 1.09 (Varies by Product)
Dimming Capable	Yes
Bending Parameters	Factory bends available
Limited Warranty Terms	7 Years
Materials	PVC, UV and impact resistant
Dimensions	Laser 1.70 x 1.70, Leon 2.00 x 1.70
Certification	cULus E174914

LEON™



LASER™



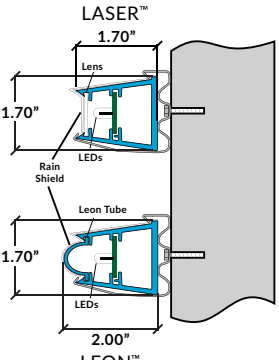



Diagram labels: LASER™, 1.70", Lens, Rain Shield, LEDs, Leon Tube, LEON™, 2.00"



LEKTRON
Branding Solutions

918.622.4978
www.lektroninc.com
sales@lektroninc.com